## **SDSC-2001+**

The SDSC product range supports the switching and distribution of 18Gbps HDMI video. This includes video resolutions up to 4K and 2K with a refresh rate of 60Hz. together with colour sub-sampling of 4:4:4 for YPrPb, totaling 18Gbps and HDCP 2.2 compliant

The SDSC-2001+ is a flexible and cost effective wall plate transmitter and compact receiver solution for extending 4K HDMI resolution video, DisplayPort and USB signals together with POC (remote power over cable). The pair of units are supplied as a convenient UK size double gang transmitter wall/ floor plate (SDSC-TX2001+) together with its complementary compact receiver (SDSC-RX2000+).



+44 (0) 1306 628264 www.smart-e.co.uk SDSC-2001+ Application drawing 1

SDSC-RX2000+

SDSC-RX2000

24V DC

Power

HDBaseT

input

HDMI

output


Receiver connection details

HDMI

input

Audio

|| output

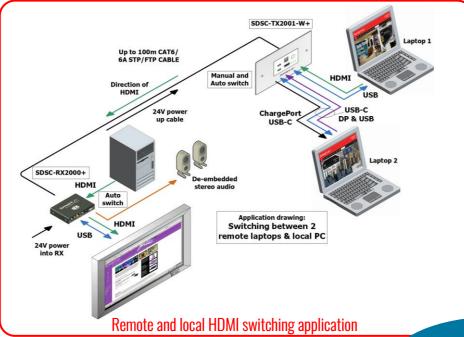

USB-C input USB-B V2.0 Input select connection charaina button Smart-e USB-Cinput LED HDMI input DisplayPort Indicators Transmitter connection details

**New Improved** specification


Smart-e

USB

Tupe A

SDSC-2001+ Application drawing 2

SDSC-TX2001+

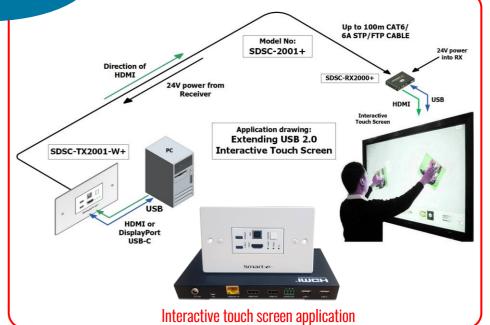

100m CAT 6 **HDMI 2.0b DisplayPort** 1.2a

> 4K@60Hz 4:4:4 18Gbps **HDCP 2.2** HDR10/10+

**USB 2.0** USB-C DP USB-C charging

**HDBaseT** CEC compliant

TX **UK/Decora Wall plate Custom colours 24V POC** 

RX **Audio output Priority switch Auto/manual** Secure DC

Smart-e