

Flexible and comprehensive enhanced 4K@60Hz 4:4:4 professional Modular Video Processing Matrix



Seamlessly route 16 UHD video sources to 16 displays & create a Video Wall or Multiviewer for HDMI or HDBaseT at up to 4K 60Hz resolution video

**INPUT**

**New features**

**OUTPUT**

- OSD characters
- Preview card for source
- Real time clock display
- Background image
- Image cropping
- IP camera + split screen
- Add rolling subtitles
- Signal detection

**Tech spec**

- Resolutions to 4K60 UHD
- HDCP 2.3 compliant
- RS232 & IR control/passthrough
- HDMI 2.0 compliant
- Supports Deep Colour
- Embedding & de-embedded Audio
- 18Gbps, 4K@60Hz
- Scaled outputs
- POC (remote powering receivers)

**Features**

- Modular 4 port cards
- Front panel control
- Professional Seamless Switching
- IP Control
- Integrated Web Browser
- Enhanced EDID management
- Video Wall Processor
- Preview quad output
- HDMI and HDBaseT signal format

**Description**

The VDX-16x16 is a professional flexible Digital Modular Matrix (DMM+) capable of selecting between 16 different devices to 16 displays. Seamless switching together with output video scaling provides a professional image selection with the option of creating a multi-display Video Wall. Connectivity to the matrix is via eight slots each capable of accepting 4-way modular input and output cards catering for a wide range of signal formats. Fully HDCP compliant and incorporating enhanced EDID management the VDX-16x16 matrix is ideal for many multi-channel signal switching and distribution for Commercial, Educational and Residential solutions. Compact 3U 19" rack mounting chassis makes for ease of installation

DESIGN

◆ INNOVATE

◆ ORIGINATE

Smart-e

## DESCRIPTION - GENERAL

The VDX DMM+ 4K60 18Gbps range of audio-visual (AV) matrices offer a complete solution for switching and distribution of the most common AV signal types and standard connectivity.

Differing signal types can be accommodated by the use of a modular construction. Removeable horizontal blades can be inserted or exchanged allowing inputs and outputs to be expanded in groups of 4 up to the maximum chassis size available. A variety of different blades are presented including: HDMI, DVI, HDBaseT, 3G-SDI and fibre options together with an analogue card capable of accepting RGBHV, YPrPb, Y/C and PAL/NTSC.

All input signals types are converted to an internal standard format allowing the flexibility of conversion to any output signal format. The conversion in an internal co-timed format provides a seamless switching feature allowing images to be changed without frame rolls or the need to go to black. Each output blade has a individual internal scaler allowing every output image to scale to the native resolution of the connected display for a more professional presentation.

Current chassis sizes are available as 16x16, 32x32 and 68x68. Each chassis is supplied with a quantity of empty slots capable of housing a number of 4 way input/output blades, depending on the maximum size of the matrix. The chassis can be partially populated helping match the installation and budget requirements.

All the matrices encompass comprehensive methods of control including IP, an internal web browser, RS232, remote panel and front panel buttons with LCD display.

The VDX range now incorporates videowall processor technology which allows a number of output blades to be grouped together to form a multi display video mosaic or wall. This feature is available for the HDMI and HDBT output cards.

Control signal routing is offered as standard allowing RS232 signals to be selected independently between the HDBaseT inputs and outputs. The signals can be connected via the blades directly or through the connected appropriate transmitters and receivers.

To aim ease of installation and improve power efficiency and heat dissipation, powering of the transmitters and receivers is achieved through the Cat 6/6A cable. DC power is sent via common mode connection across the 4 differential pairs of the network cabling.

For each matrix there is the option of a dual redundant power supply. These are hot swapping, removeable units installed at the rear of the unit and connected by an additional IEC mains lead. Ideal for mission critical applications like command and control centres and disaster recovery vehicles.

Embedded multi-channel audio from the source device is routed along with the video signal but can be swapped with a locally generated signal and inserted via the HDMI or DVI blade. Similarly embedded audio is transmitted inside the output video signal but is also available as a stereo analogue signal on the HDMI output blades.

A preview card is also available as an output blade option. This features a streamed MPEG signal capable of displaying a composite of up to 4 input images. By using a streamed signal, remote monitoring of the matrix and the source devices is possible, ideal for inaccessible locations and in particular boats and yachts.

**smart-e**

DESIGN



INNOVATE



ORIGINATE

## DESCRIPTION - FEATURES

### 4K60 video image processing

Each card features four input/output ports, capable of supporting up to 4K@60Hz 4:4:4 resolution. The signal source can freely create windows, PIP (Picture in Picture), roaming, and zoom effects on the video wall. Additionally, vertical sync technology guarantees synchronized and smooth display of high-speed moving images across all spliced screens, along with customizable resolutions for individual LED screens

### Seamless switching technology

Utilizing full digital splicing switching technology, this system guarantees seamless switching with no black screens, no flashing, no fragmentation, and no static images. It supports arbitrary switching between 2K and 4K signals and employs a 4:4:4 full frame rate graphics processing algorithm, achieving a delay as low as 0 ms.

### Signal source management

The input source image can be partially cropped to create a new video source, allowing for station logo display. Users can overlay images on the signal source or customize text in any language or font. Additionally, there is a setting for outputting a test image.



### IPC decoding

Support for mass IPC signal access allows a single card to decode up to 100 IPC signals simultaneously on the screen. With unified IPC management, users can easily drag IPCs directly from the software interface onto the video wall.

### Intelligent banner

Create a large-screen banner by customizing the welcome slogan or uploading images. You can modify the banner's color, font, size, position, and other details, as well as display the real-time clock.

### Background image

Upload a local HD image as the background without impacting the number of window layers. There's no data loss when the power is turned off, and it automatically recovers upon power restoration.

smart-e

DESIGN



INNOVATE



ORIGINATE

**DESCRIPTION - FEATURES**



**Dual control cards: master & backup**

Optional dual control cards, consisting of one main and one standby, ensure the system operates reliably and stably.

**Automatic signal backup**

It features an automatic backup function for all input and output signals. In the event of a signal interruption, the processor will intelligently detect, assess, and automatically switch to ensure seamless operation.




**Monitoring alerts**

It monitors the status of each module and can proactively issue alerts and notifications in the event of equipment failure.

**Visual operation of multi-terminal**

Signal visualization preview: This system enables visualization, movement, and touch-based management across any PC, mobile phone, or tablet, with multiple operation terminals controlled and synchronized simultaneously.

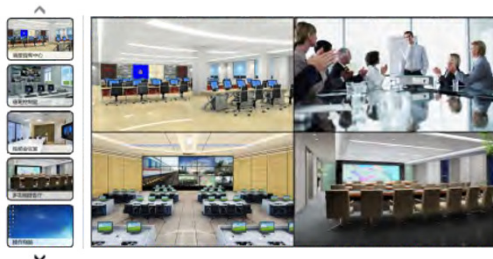

**Input signal full preview**

Provides a web interface and software for visual preview of all input signal sources and real-time monitoring of spliced large-screen content. Additionally, it supports HDMI echo cards for hardware-based monitoring of the spliced large-screen content via a connected monitor.

**Modular hardware architecture**

The hardware modularization allows for flexible hybrid plug-in of input and output cards, enabling online maintenance and expansion. It features hot-pluggable fans for easy replacement and includes redundant power supplies for added reliability.



smart-e

DESIGN



INNOVATE



ORIGINATE

## DESCRIPTION - FEATURES



### Multi-device intelligent control

It can send control commands to third-party devices, enabling operations such as switching large screens, raising or lowering curtains, and more.



### KVM management

A single mouse and keyboard can control multiple computers, with the ability to switch between systems remotely using the keyboard

smart-e

DESIGN



INNOVATE



ORIGINATE

**TECHNICAL SPECIFICATION****Video - Digital**

Connectors	4 x HDMI (Type A) input and outputs 4 x DVI-D 4 x CAT 6 for HDBaseT
Signal type	HDMI - TMDS
Standards	HDMI 2.0. HDCP 2.3
Maximum data rate	6Gbps per colour
Maximum pixel clock	600MHz
Resolution range - DTV	Max 4096x2160 @60Hz 36 bit colour depth
Resolution range - PC	Max 1920x1200 @60Hz 24 bit colour depth
Frame rate	24, 25, 30, 50 & 60 Hz
Gain	0 dB
Formats	RGB and YCrCb
Colour space	4:4:4, 4:2:2 & 4:2:0
Clock jitter	<0.15T bit
Rise time	<0.3T bit (20-80%)
Fall time	<0.3T bit (20-80%)
Maximum transmission delay	5ns (+/- 1ns)
Signal strength	TMDS +/- 0.4V pk-pk
TMDS signal level	2.9V - 3.3V
Impedance	50R
Maximum DC offset	15mV
Maximum input cable length	15m 24 AWG
Maximum output cable length	15m 24 AWG

**Audio - Digital**

Standards	Embedded within the HDMI signal, SPDIF
Maximum audio channels	8
Maximum sample rate per channel	192 kHz
Sample size	16-24 bits

**Audio - Analogue**

Standards	Stereo - unbalanced
Bandwidth	20 - 20 kHz

**Power**

AC Voltage	100-230 VAC
AC frequency	50/60 Hz
Power consumption	13.5W (max)/1.2W (standby)
Operating temperature	0-40 degrees C
Storage temperature	-20-60 degrees C
Relative humidity	20-90%
Chassis size	3U 19" rack mounting
Chassis dimensions	440x394x133mm
Product weight	8Kg
MTBF	30,000 hours

**smart-e**

DESIGN



INNOVATE



ORIGINATE

## TECHNICAL SPECIFICATION

### Control - RS232

Connector	D9
Signal type	Full duplex
Signal level	+/- 5V
Baud rate	115200
Data bits	8
Stop bits	1
Parity	None
Pinout	1-RX, 2-0V, 3-TX

### Control - Ethernet

Connector	RJ45 female
Protocol	TCP/IP
Control rate	Adaptive 10M/100M full or half duplex


### Control - IR

Connector	3.5mm mini-jack socket
Signal type	Full duplex (via 2 connections)
Signal bandwidth	20-60KHz

### Cat cable connectivity

Number of cables	1 x Cat 6/6A screened twisted pair cables
Connectors	1 x female screened RJ45 connectors per unit
Termination standard	TIA/EIA T568B
Cable requirements	Solid conductor, 24 AWG or better
Cable recommendations	400 MHz bandwidth STP (shielded twisted pair)
Transmission distance	100m shielded twisted pair CAT 6 or CAT 6A

## WEB BROWSER

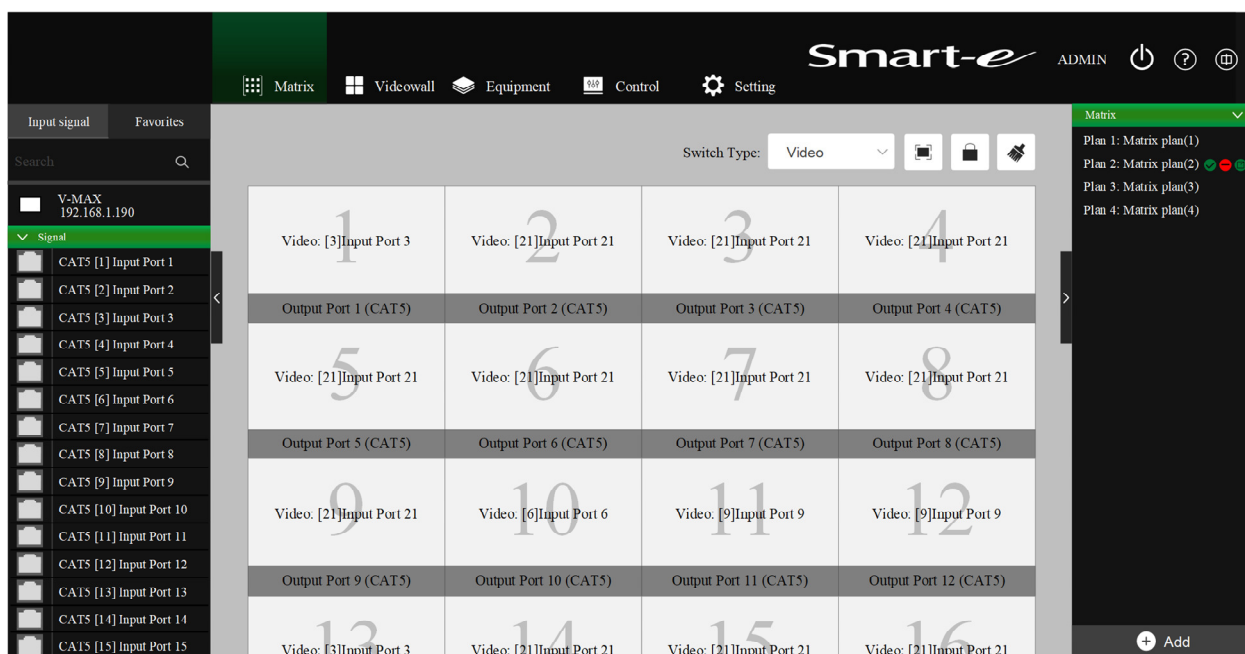

specifications are subject to change without notice

# Smart-e

DESIGN

INNOVATE

ORIGINATE

**SEAMLESS INPUT & OUTPUT BLADES**

**VDX-IP4-HDMI**



- Provides 4x independent HDMI [Type-A] inputs
- HDMI 2.0, DVI 1.0 & HDCP 2.3 protocol
- Supports EDID editing function
- Maximum input resolution:
- 4K @ 60Hz 24Bit, 1920x1200p @ 60Hz 24bit

**VDX-OP4-HDMI**



- Provides 4x independent HDMI [Type-A] outputs
- HDMI 2.0, DVI 1.0 & HDCP 2.3 protocol
- Maximum output resolution:
- HDCP: 1920x1200p @ 60Hz 24bit
- HDTV: 4096x2160 @ 60Hz 24bit

**VDX-RX4-HDBT-F**



- Provides 4x independent HDBaseT inputs
- Compatible with 100m HDBaseT protocol
- Supports EDID editing function
- Maximum input resolution:
- 4K @ 60Hz 24Bit, 1920x1200p @ 60Hz 24bit

**VDX-TX4-HDBT-F**



- Provides 4x independent HDBaseT outputs
- Compatible with 100m HDBaseT protocol
- Maximum output resolution:
- HDCP: 1920x1200p @ 60Hz 24bit
- HDTV: 4096x2160 @ 60Hz 24bit

**VDX-RX4-HDBT-L**





- Provides 4x independent HDBaseT inputs
- Compatible with 40m HDBaseT protocol
- Supports EDID editing function
- Maximum input resolution:
- 4K @ 60Hz 24Bit, 1920x1200p @ 60Hz 24bit

**VDX-TX4-HDBT-L**



- Provides 4x independent HDBaseT outputs
- Compatible with 40m HDBaseT protocol
- Maximum output resolution:
- HDCP: 1920x1200p @ 60Hz 24bit
- HDTV: 4096x2160 @ 60Hz 24bit


**PANEL DRAWINGS**

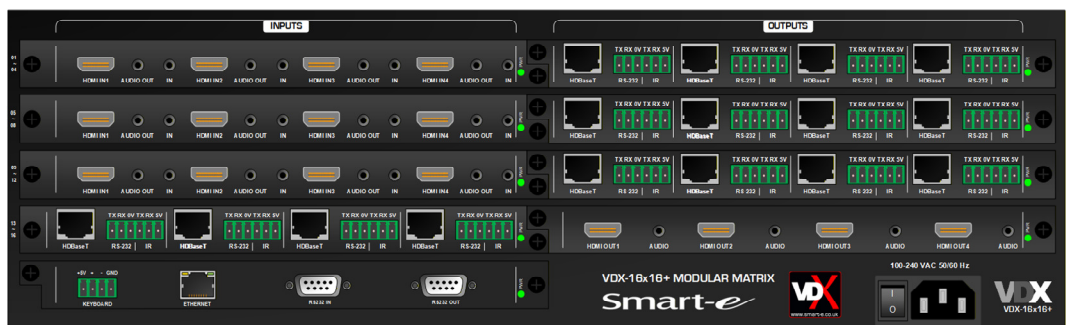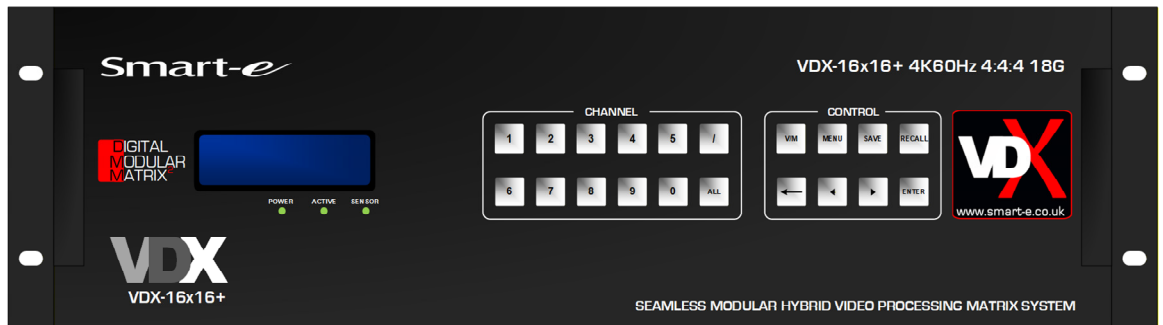

specifications are subject to change without notice

DESIGN  
◆  
INNOVATE  
◆  
ORIGINATE

**SEAMLESS SWITCHING & VIDEO WALL APPLICATION DRAWING**

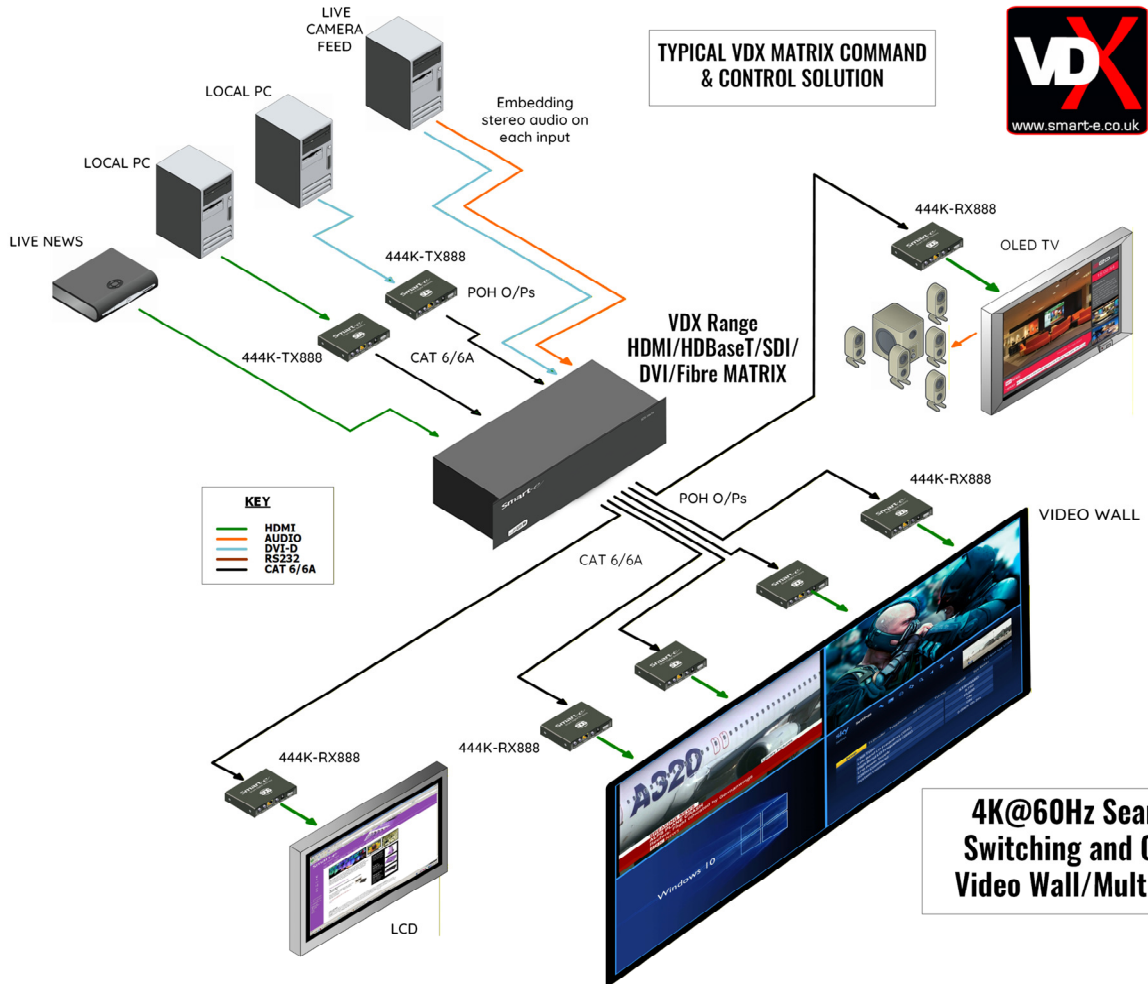

**REAR VIEW**



specifications are subject to change without notice

Smart-e

DESIGN



INNOVATE



ORIGINATE

**VIDEO PROCESSING OUTPUT BLADES**

**VDS-OP4-HDMI-2L**



- Provides 4 x independent HDMI [Type-A] outputs
- HDMI 2.0, DVI 1.0 & HDCP 2.3 protocol
- Maximum output resolution:
- HDTV: 4096x2160, HDPC: 1920x1200 @60Hz
- Each video wall output provides 2 separate layers

**VDS-OP2-HDMI-4L**



- Provides 2 x independent HDMI [Type-A] outputs
- HDMI 2.0, DVI 1.0 & HDCP 2.3 protocol
- Maximum output resolution:
- HDTV: 4096x2160, HDPC: 1920x1200 @60Hz
- Each video wall output provides 4 separate layers

**VDS-TX4-HDBT-F2L**



- Provides 4 x independent HDBaseT outputs
- Compatible with 100m HDBaseT protocol
- Maximum output resolution:
- HDTV: 4096x2160, HDPC: 1920x1200 @60Hz
- Each video wall output provides 2 layers

**VDS-TX2-HDBT-F4L**



- Provides 2 x independent HDBaseT outputs
- Compatible with 100m HDBaseT protocol
- Maximum output resolution:
- HDTV: 4096x2160, HDPC: 1920x1200 @60Hz
- Each video wall output provides 4 layers

**VDS-TX4-HDBT-L2L**



- Provides 4 x independent HDBaseT outputs
- Compatible with 40m HDBaseT protocol
- Maximum output resolution:
- HDTV: 4096x2160, HDPC: 1920x1200 @60Hz
- Each video wall output provides 2 layers

**VDS-TX2-HDBT-L4L**



- Provides 2 x independent HDBaseT outputs
- Compatible with 40m HDBaseT protocol
- Maximum output resolution:
- HDTV: 4096x2160, HDPC: 1920x1200 @60Hz
- Each video wall output provides 4 layers

**VIDEO WALL & MULTIVIEWER FEATURES**

**ROAMING WINDOWS – MULTIVIEWER 4 LAYER**



**3x3 VIDEO WALL**

specifications are subject to change without notice

DESIGN



INNOVATE



ORIGINATE

**VDX NEW BLADES**


**VDX-PVW**



- Provides 2 x independent RJ45 outputs
- Quad screen split image
- Resolutions: 1080p@30Hz or 720p@60Hz

**Preview input source**

The VDX-PVW blade allows the monitoring of every input. Each source can be scrolled through prior to selection to the quad preview display. The preview video is available through an IP stream on an Ethernet port

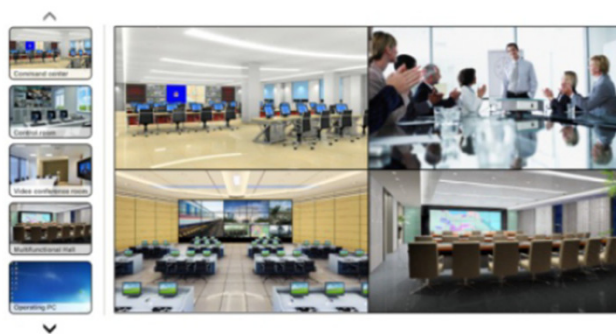


**VDX-IP2-IPC**



- Provides 2 x independent RJ45 inputs
- Protocols: RTP, RTSP, RTCP, TCP, UDP, ONVIF
- Others: G711a, G711u, G726 & ADPCM
- Max resolution 4K@30Hz
- Multiple split screen view

**IP input card**


The MDX-IP2-IPC blades allow a direct connection to the matrix from various IP sources. The blade is ideal for interfacing to IP cameras in security applications. Video feeds can be viewed as multiple split screens as 1, 4, 9, 16 or 25 separate images as a mosaic.

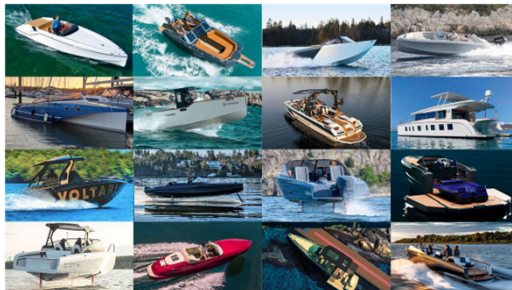

**NEW FOR VDX RANGE**

**On Screen Display (OSD) for inputs**

Input blade features include the ability to add an onscreen display to each individual input. Characters can be superimposed on the incoming video with the ability to change the text colour and background. The position can also be altered together with the facility to have the text move either forward or backward.

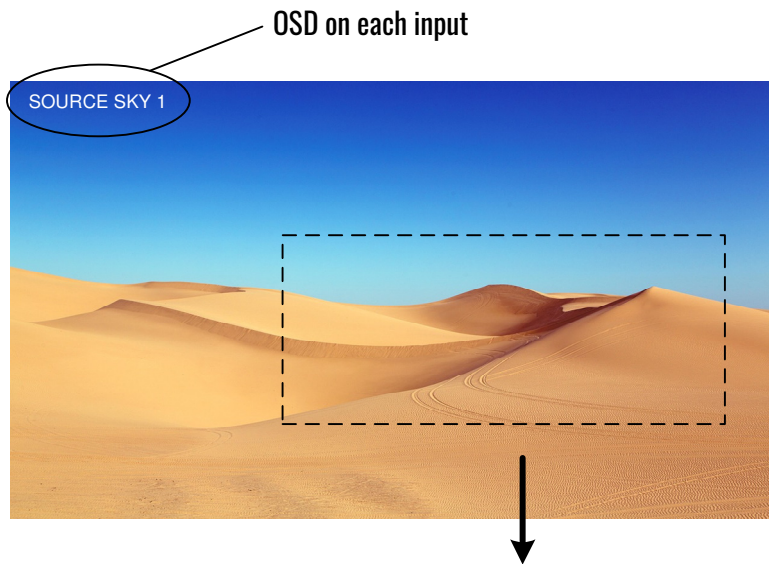

**Input Image cropping**

Each input video source can be cropped. Any portion of the image can be selected with X.Y coordinates and then scaled up to the appropriate resolution.



**Output text and image**

Each video wall output blade can provide a number of new features expanding the use of the system to other important applications. An additional image can be uploaded and stored locally for each output background. This image is in addition to the number of window layers available. Scrolling text with banner can be added to each output including the ability to adjust the colour, size, speed and direction of the text. Lastly system time and date stamp can be added to the image with position and size adjustable.



Rolling subtitles